



LEED Q & A

LEADERSHIP IN ENERGY AND ENVIRONMENTAL DESIGN

WHAT IS LEED?

LEED is an internationally recognized green building certification system developed by the U.S. Green Building Council. LEED provides a set of standards that designers, owners, and operators can use to identify and measure green building. LEED provides third-party verification that a building or community was designed and built with key factors in mind: Sustainable Sites, Energy Savings, Water Efficiency, Materials & Resources, Indoor Environmental Quality, Locations & Linkages, Awareness & Education.

WHAT IS LEED CERTIFICATION?

LEED certification is based on a 100-point scale based on the key factors mentioned above and applies to green building projects. The points are weighted to reflect their potential impact on the environment. The 100-point scale looks much like you would see on the back of any food product showing nutritional values. Architects, contractors, and owners apply for LEED certification and must first meet a minimum requirement to achieve a "Certified" level. The levels of LEED certification start at Certified and move up through Silver, Gold, and Platinum levels.

Products and services themselves are NOT LEED certified, it is the green project/ building as a whole that is LEED certified. The individual products and services do contribute to the points and overall rating of the green project. According to the USGBC, LEED certified buildings cost less to operate and maintain, are healthier places to live and work, and conserve our natural resources (see usgbc.org for more information).

WHAT LEED CATEGORIES CAN FISHER PRODUCTS QUALIFY FOR?

Water Efficiency-the goal of water efficiency is to encourage smarter water use (see usgbc.org for more information). Fisher items that fall under this category are Ultra™ Spray Valve Pre-Rinse Units, and Faucets with 0.5 to 2.2 GPM aerators.

Materials and Resources-encourages the selection of sustainably grown, harvested, produced, and transported materials. It promotes waste reduction as well as reusing and recycling (see usgbc.org for more information). Fisher falls under this category because of Fisher's 100% commitment to sustainability and 100% recyclability of its products.

All Information gathered can be found at www.usgbc.org

FOR LEED WATER EFFICIENCY CREDITS

SPEC THE RIGHT SPOUT.

Pick Your Brass Spout	0.5 GPM	1.0 GPM	1.5 GPM
6" Swing Spout	3960 & 74223	3960 & 74336	3960 & 74335
8" Swing Spout	3961 & 74223	3961 & 74336	3961 & 74335
10" Swing Spout	3962 & 74223	3962 & 74336	3962 & 74335
12" Swing Spout	3963 & 74223	3963 & 74336	3963 & 74335
14" Swing Spout	3964 & 74223	3964 & 74336	3964 & 74335
16" Swing Spout	3967 & 74223	3967 & 74336	3967 & 74335
11" Control Spout	4000-0001 & 74223	4000-0001 & 74336	4000-0001 & 74335
6" Swivel Gooseneck Spout	3968 & 74223	3968 & 74336	3968 & 74335
12" Swivel Gooseneck Spout	3965 & 74223	3965 & 74336	3965 & 74335

Pick Your Stainless Steel Spout	0.5 GPM	1.0 GPM	1.5 GPM
6" Swing Spout	54380 & 41718	54380 & 54348	54380 & 74334
8" Swing Spout	54399 & 41718	54399 & 54348	54399 & 74334
10" Swing Spout	54402 & 41718	54402 & 54348	54402 & 74334
12" Swing Spout	54410 & 41718	54410 & 54348	54410 & 74334
14" Swing Spout	54429 & 41718	54429 & 54348	54429 & 74334
16" Swing Spout	54445 & 41718	54445 & 54348	54445 & 74334
12" Control Spout	55042 & 41718	55042 & 54348	55042 & 74334
6" Swivel Gooseneck Spout	54453 & 41718	54453 & 54348	54453 & 74334
12" Swivel Gooseneck Spout	54437 & 41718	54437 & 54348	54437 & 74334

Pick your spout in brass or stainless steel. Then pick the correct body for your specific application, in brass or stainless steel.

Example: Fisher 3963 & 74336 with 13153 which is a brass 12" swing spout with brass 8" backsplash mount faucet body.

Pick Your Faucet Body	Brass	Stainless Steel
Single Deck Dual Control	13064	63592
8" Adjustable Wall Mount	3200	61565
8" Backsplash Mount	13153	61549
4" Backsplash Mount	3600	62839
8" Deck Mount	3300	67385
4" Deck Mount	3500	67423
Pre-Rinse Add-on Faucet	2901-0000	38318



FOR LEED WATER EFFICIENCY CREDITS

SPEC THE RIGHT ULTRA-SPRAY™ VALVE


WATER-SAVING ULTRA™ SPRAY VALVE

Provides powerful performance while only using 0.70 GPM @ 60 PSI

Pick your Ultra-Spray™ Valve	Brass	Stainless Steel
Ultra-Spray™ Valve- .70 GPM@60PSI (4.4L/min @ 410 KPa)	13641	10197
Ultra-Spray™ Valve- 1.15 GPM@60PSI (4.4L/min @ 410 KPa)	2949	71307



Water Conservation Comparison-
Industry Standard to Fisher Ultra-Spray™ Valves

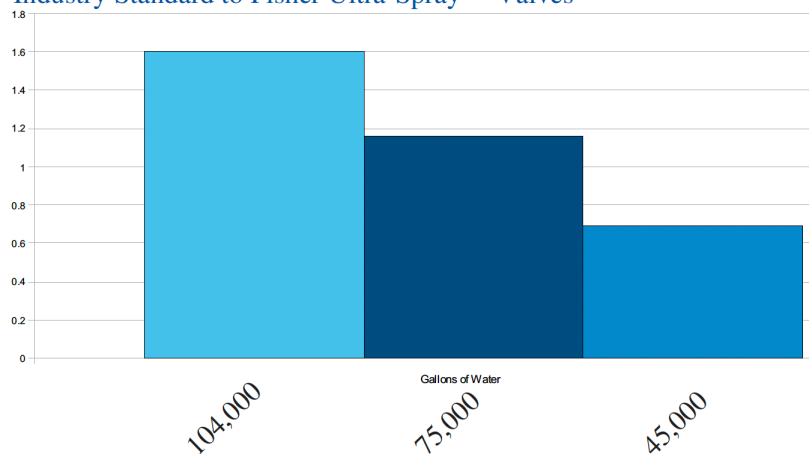

Assumptions- 3 hours a day, 7 days a week, 52 weeks a year.



AN INDUSTRY LEADER SINCE 1936

Offering a wide range of high quality commercial
foodservice and plumbing products

For more information about Fisher and/or LEEDs please contact us at:
1-800-421-6162 or visit us online at www.fisherfaucets.com

