

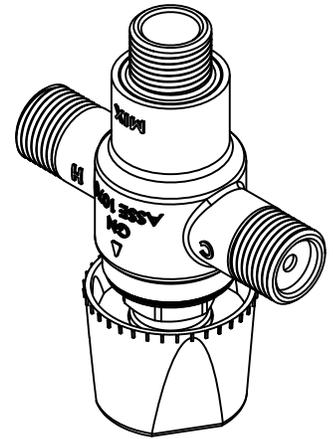

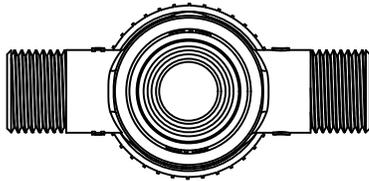


Customer/Wholesaler:	Date:	Job Name:	Model Specified: 76338	Quantity:
Contractor:		Architect/Engineer:		



1/2" NPT MALE
INLETS & OUTLET

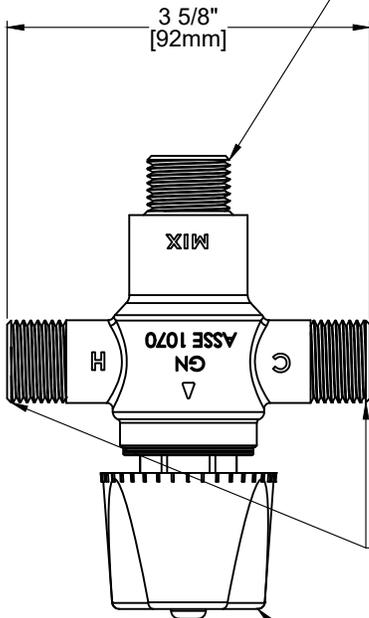

INCLUDES PART NO.
73222
UNION 1/2F BRASS
1/2 NPT FEMALE X
1/2 NPT FEMALE

5 15/16"
[150mm]

4 1/2"
[115mm]

Ø1 1/2"
[38mm]

HOT & COLD
INLET CHECK
VALVES

LOCKING VANDAL RESISTANT KNOB
LOOSENS W/ PHILLIPS
SCREWDRIVER TO ADJUST

Ø1 3/4"
[45mm]



- ANTI-SCALD THERMOSTATIC MIXING VALVE
- OUTLET TEMP RANGE: 81 - 120°F (27 - 49°C)
- HOT INLET TEMP RANGE: 120 - 180°F (49 - 82°C)
- COLD INLET TEMP RANGE: 39 - 84°F (4 - 29°C)
- MAXIMUM INLET PRESSURE: 125 PSI
- MINIMUM WORKING FLOW RATE: 0.35 GPM

PRODUCT SPECIFICATIONS: THERMOSTATIC TEMPERING VALVE 1/2" MALE

PRODUCT COMPLIANCE:
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ASSE 1070 (TMV)