
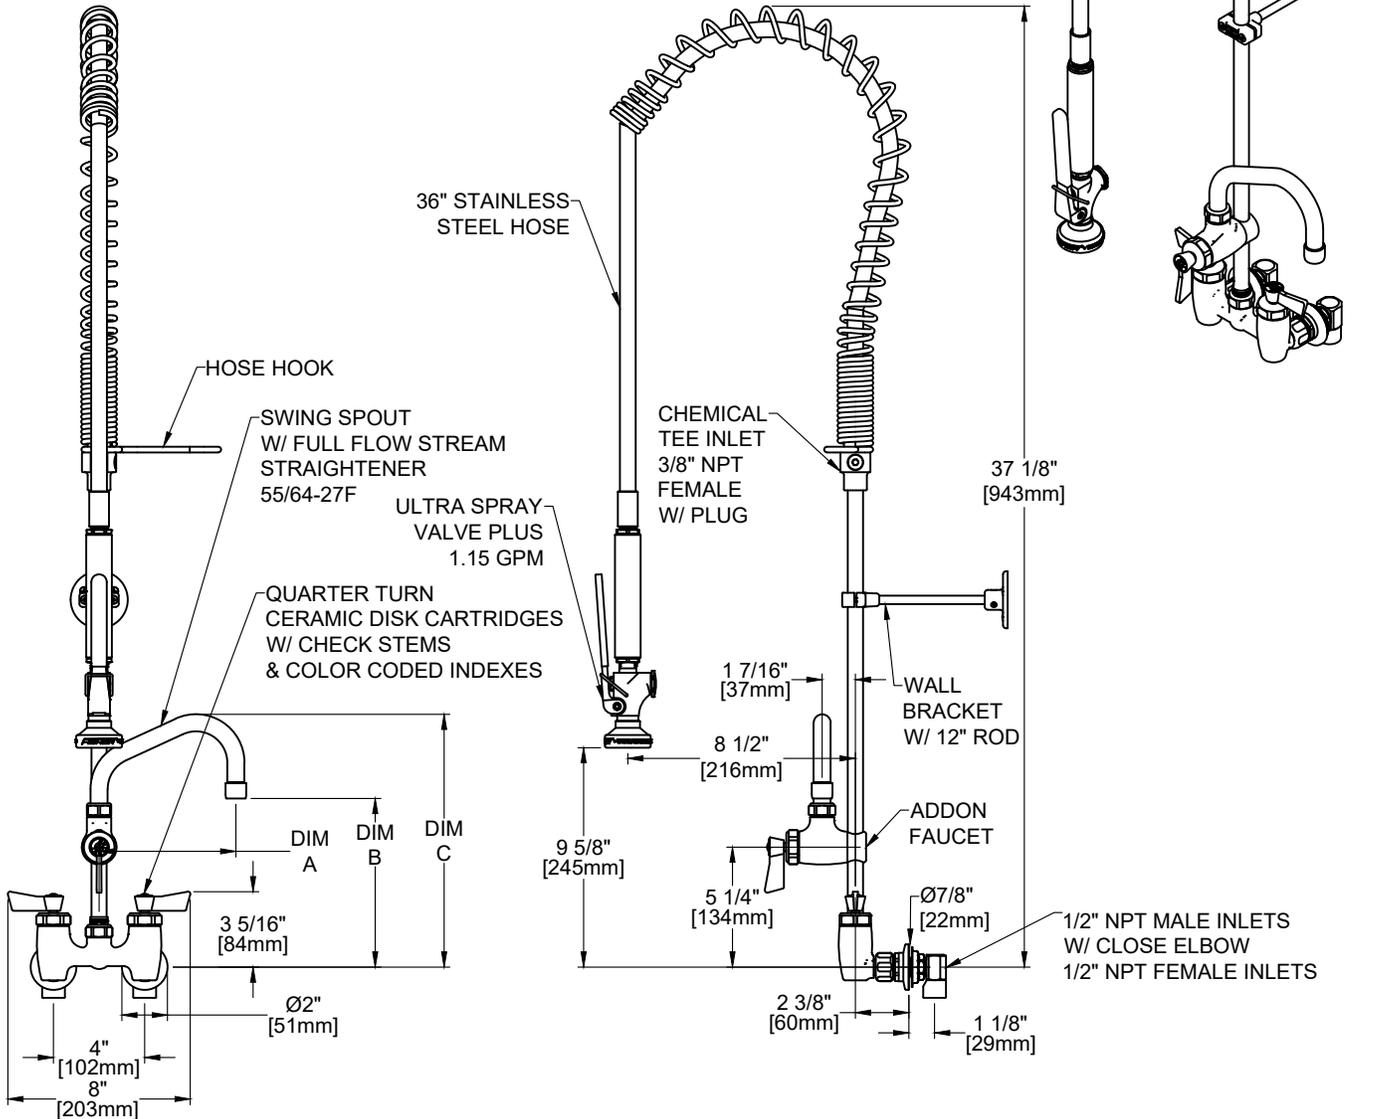
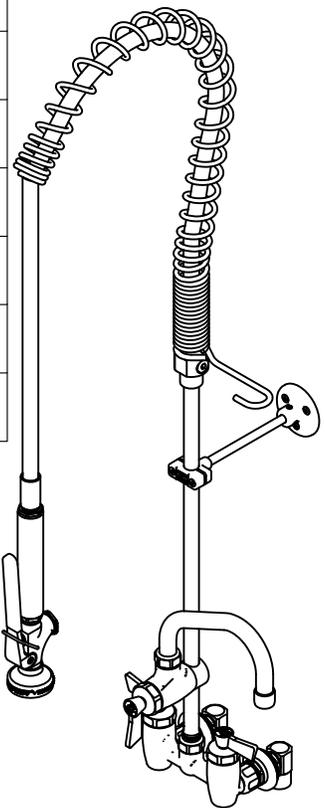


Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

MODEL	DESCRIPTION	DIM A	DIM B	DIM C
27490	PRERINSE SPG 4BSCDLH 06SS EL	6" [152mm]	7 3/8" [188mm]	11 1/8" [282mm]
27550	PRERINSE SPG 4BSCDLH 08SS EL	8" [203mm]	8 5/16" [212mm]	12" [305mm]
27510	PRERINSE SPG 4BSCDLH 10SS EL	10" [254mm]	8 3/8" [212mm]	12 1/16" [306mm]
27520	PRERINSE SPG 4BSCDLH 12SS EL	12" [305mm]	9" [229mm]	12 11/16" [322mm]
27530	PRERINSE SPG 4BSCDLH 14SS EL	14" [356mm]	9 11/16" [245mm]	13 3/8" [339mm]
27540	PRERINSE SPG 4BSCDLH 16SS EL	16" [406mm]	10 5/16" [262mm]	14" [356mm]

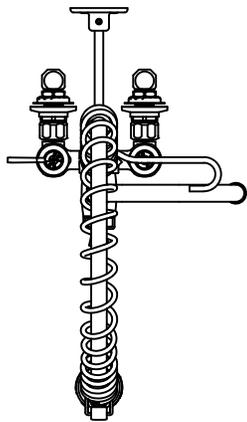


PRODUCT SPECIFICATIONS: 4" BACKSPASH SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, CLOSE ELBOWS

PRODUCT COMPLIANCE:  
ASME A112.18.1 / CSA B125.1  
NSF 61 - Section 9  
NSF 372 (Low Lead Content)  
2019 DOE PRSV - Class II

Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

## REPLACEMENT PARTS

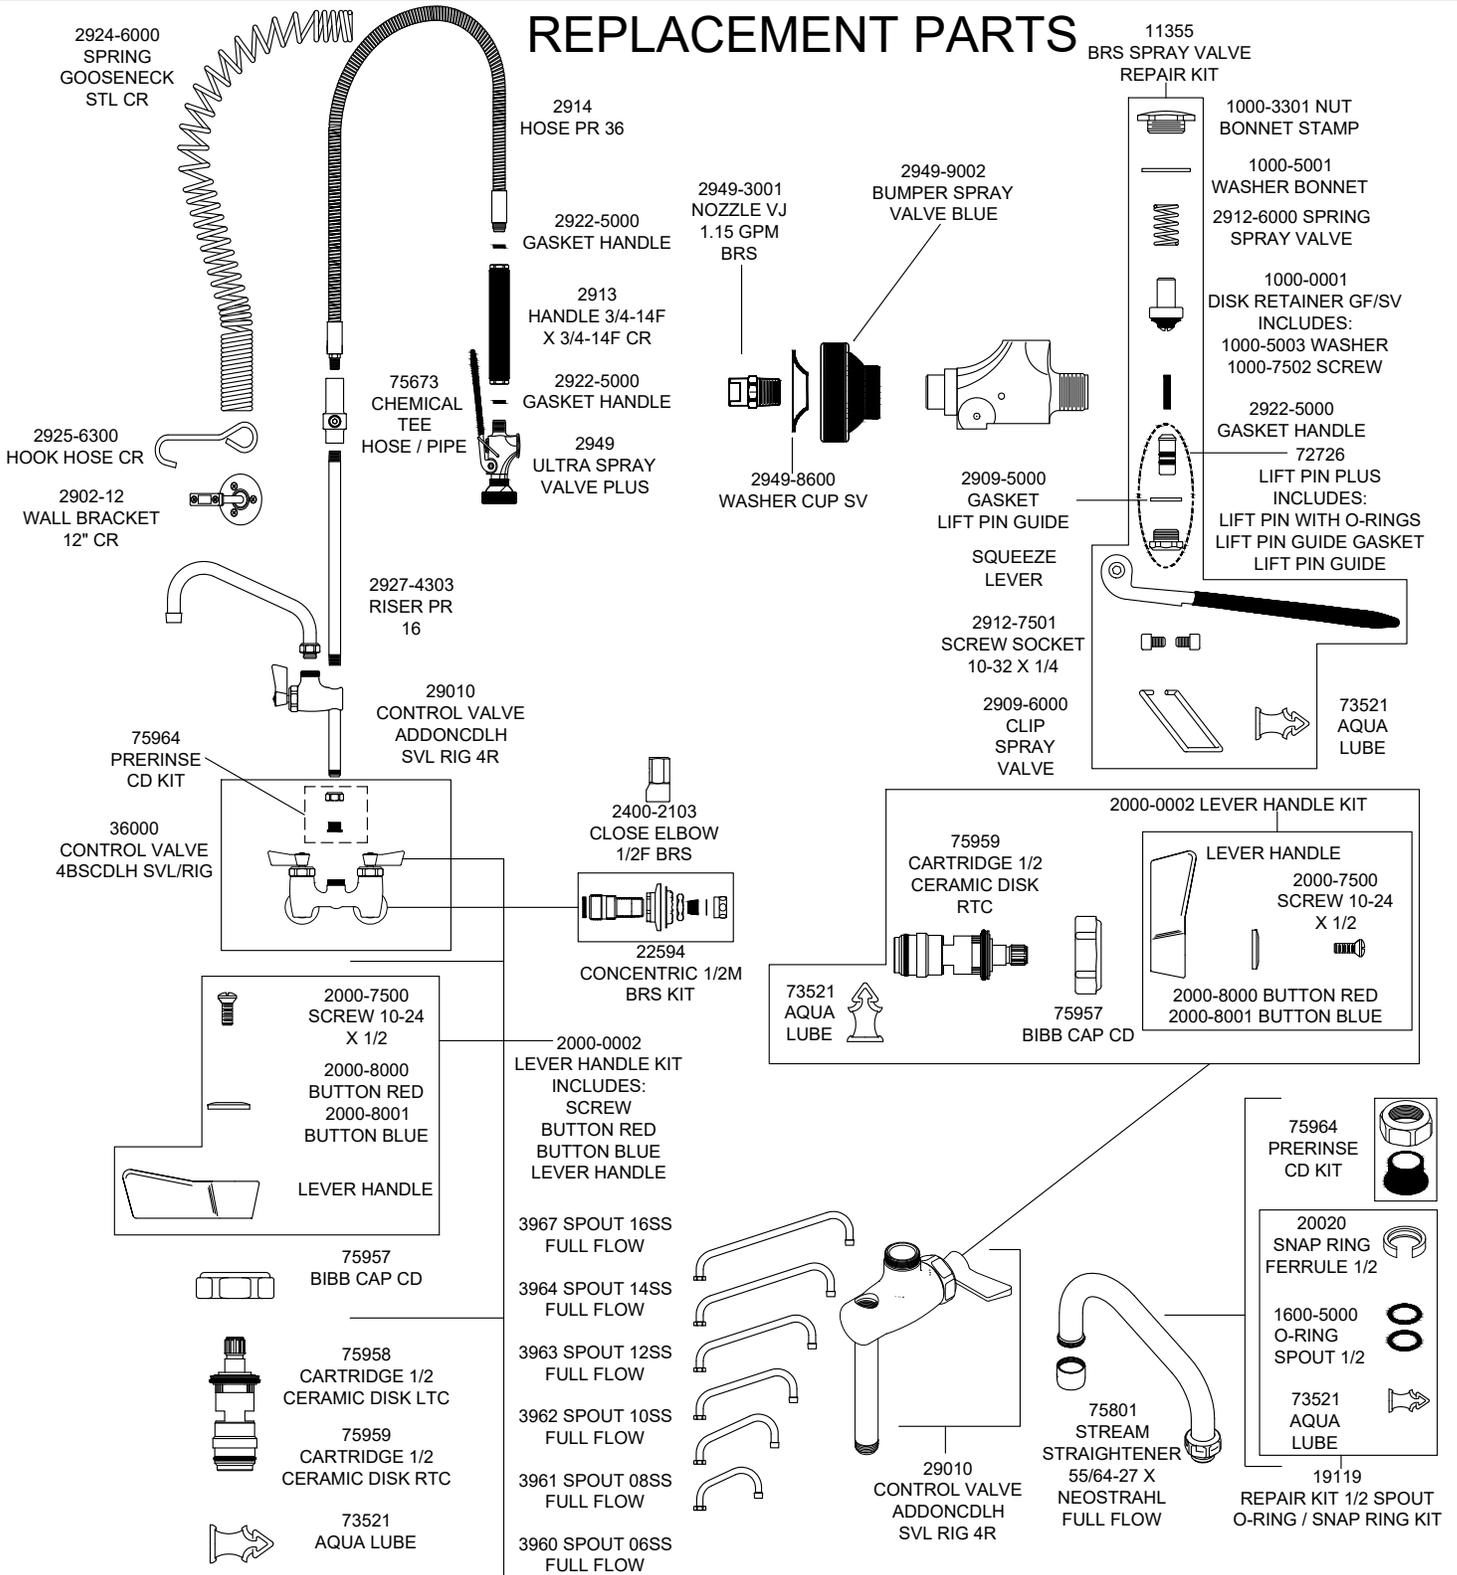

PRODUCT SPECIFICATIONS: 4" BACKSPASH SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, CLOSE ELBOWS

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) 2019 DOE PRSV - Class II