
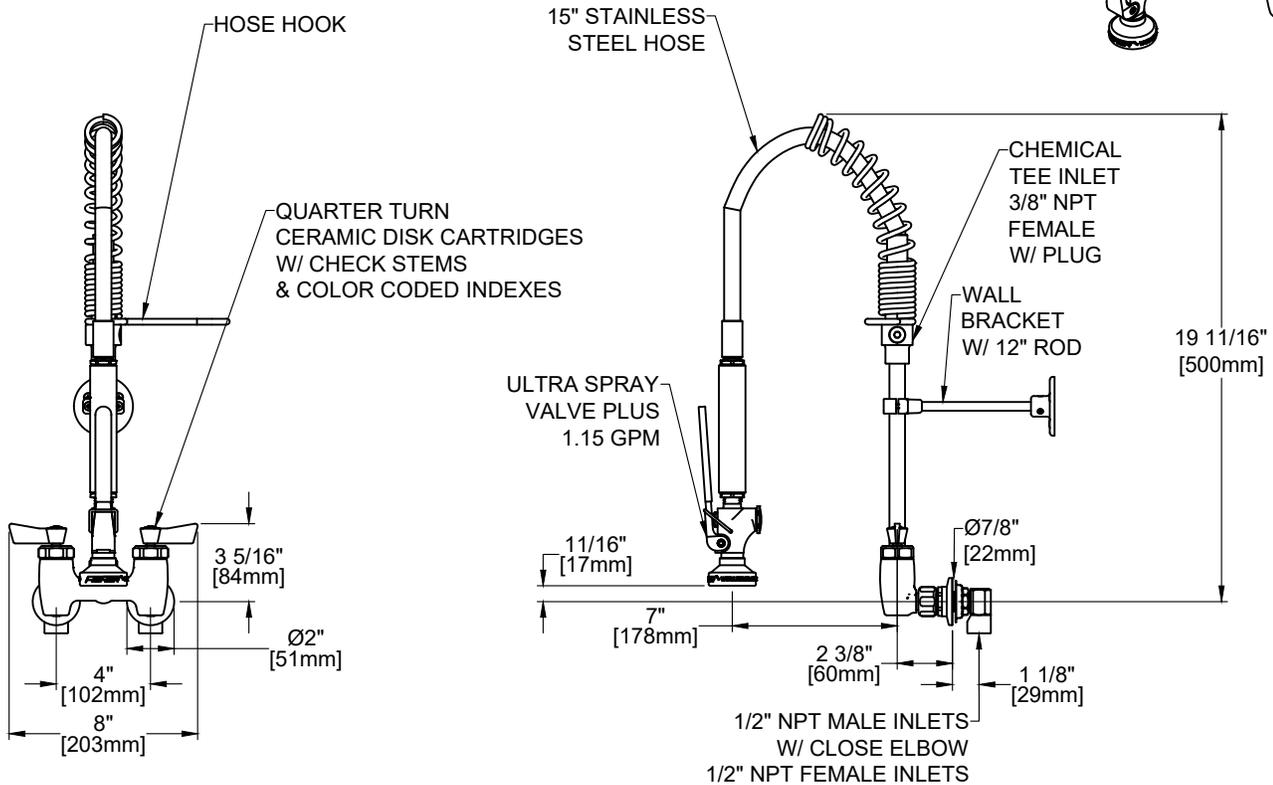
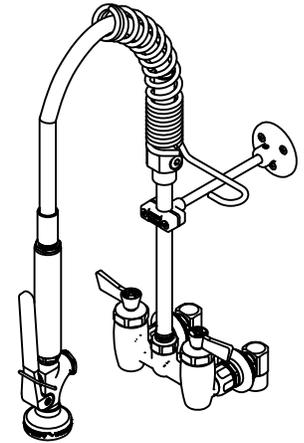


Customer/Wholesaler:	Date:	Job Name:	Model Specified: 70060	Quantity:
Contractor:		Architect/Engineer:		

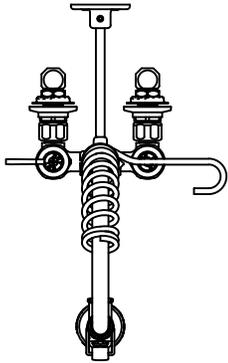


PRODUCT SPECIFICATIONS: 4" BACKSPASH LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, CLOSE ELBOWS

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class II

Customer/Wholesaler:	Date:	Job Name:	Model Specified: 70060	Quantity:
Contractor:		Architect/Engineer:		

REPLACEMENT PARTS

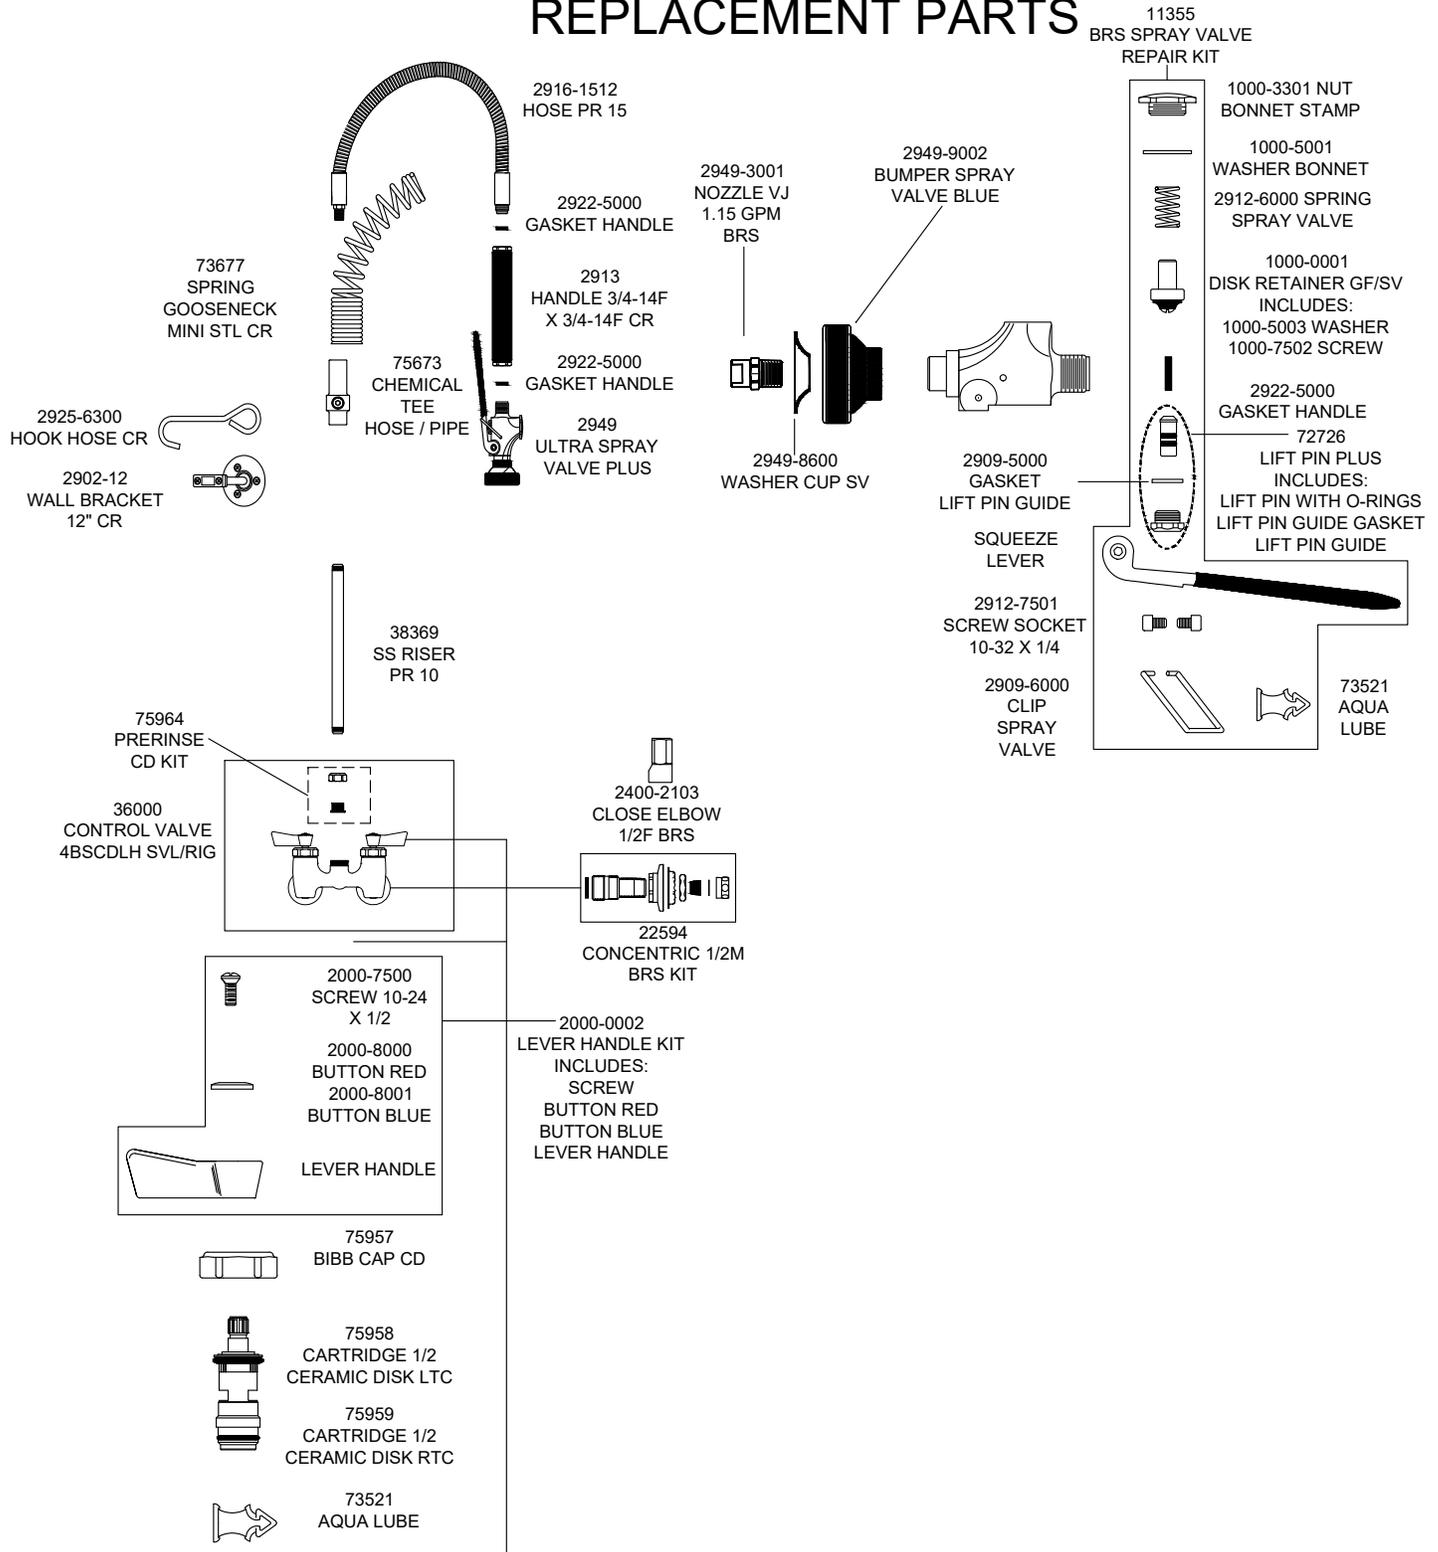

PRODUCT SPECIFICATIONS: 4" BACKSPASH LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, CLOSE ELBOWS

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class II