

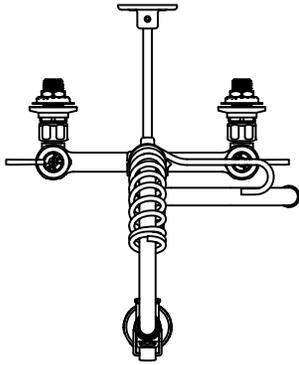


Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

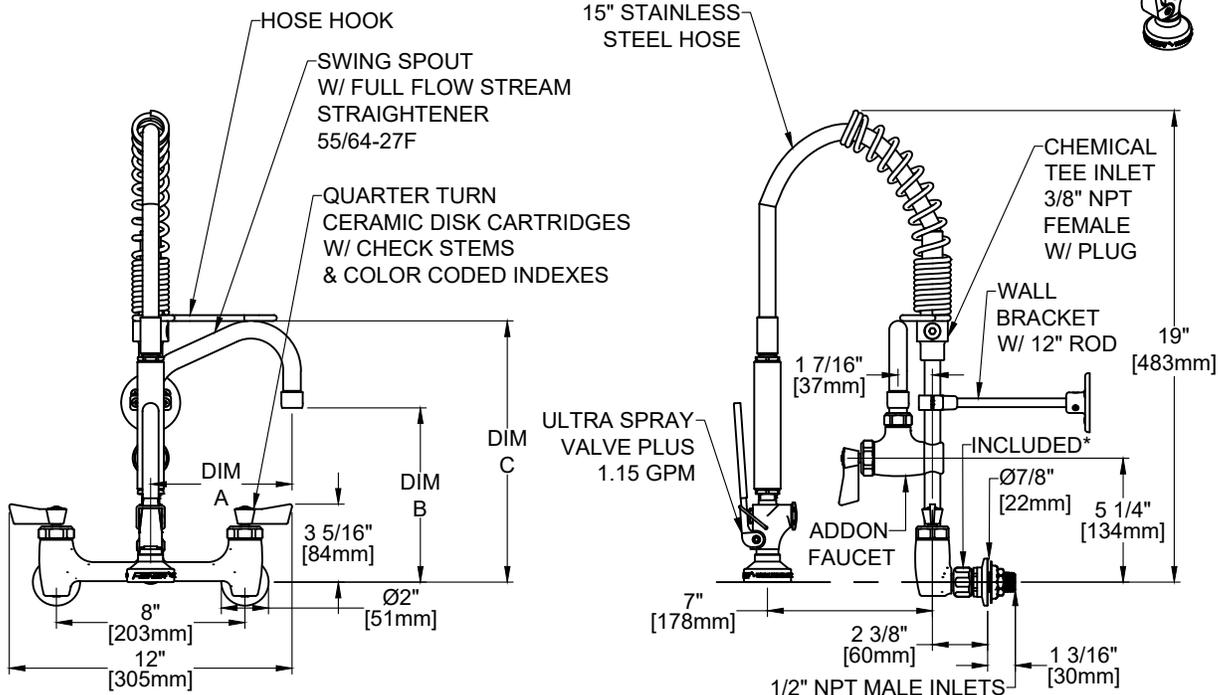

MODEL	DESCRIPTION	DIM A	DIM B	DIM C
93310	PRERINSE SLP 8BSCDLH 06SS EZ	6" [152mm]	7 3/8" [188mm]	11 1/8" [282mm]
70270	PRERINSE SLP 8BSCDLH 12SS EZ	12" [305mm]	9" [229mm]	12 11/16" [322mm]

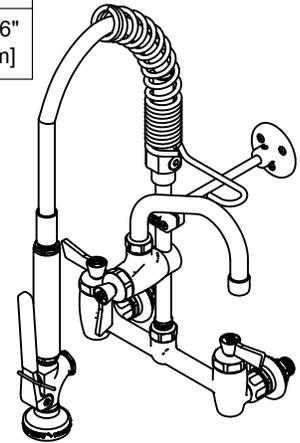


\*EZ INSTALL ADAPTERS TO CONNECT TO EXISTING HARDWARE FOR T&S, CHICAGO, KROWNE, 1/2" NPT ECCENTRIC FEMALE FLANGES

PRODUCT SPECIFICATIONS: 8" BACKSPASH LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, EZ INSTALL ADAPTERS

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) 2019 DOE PRSV - Class II

Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

## REPLACEMENT PARTS

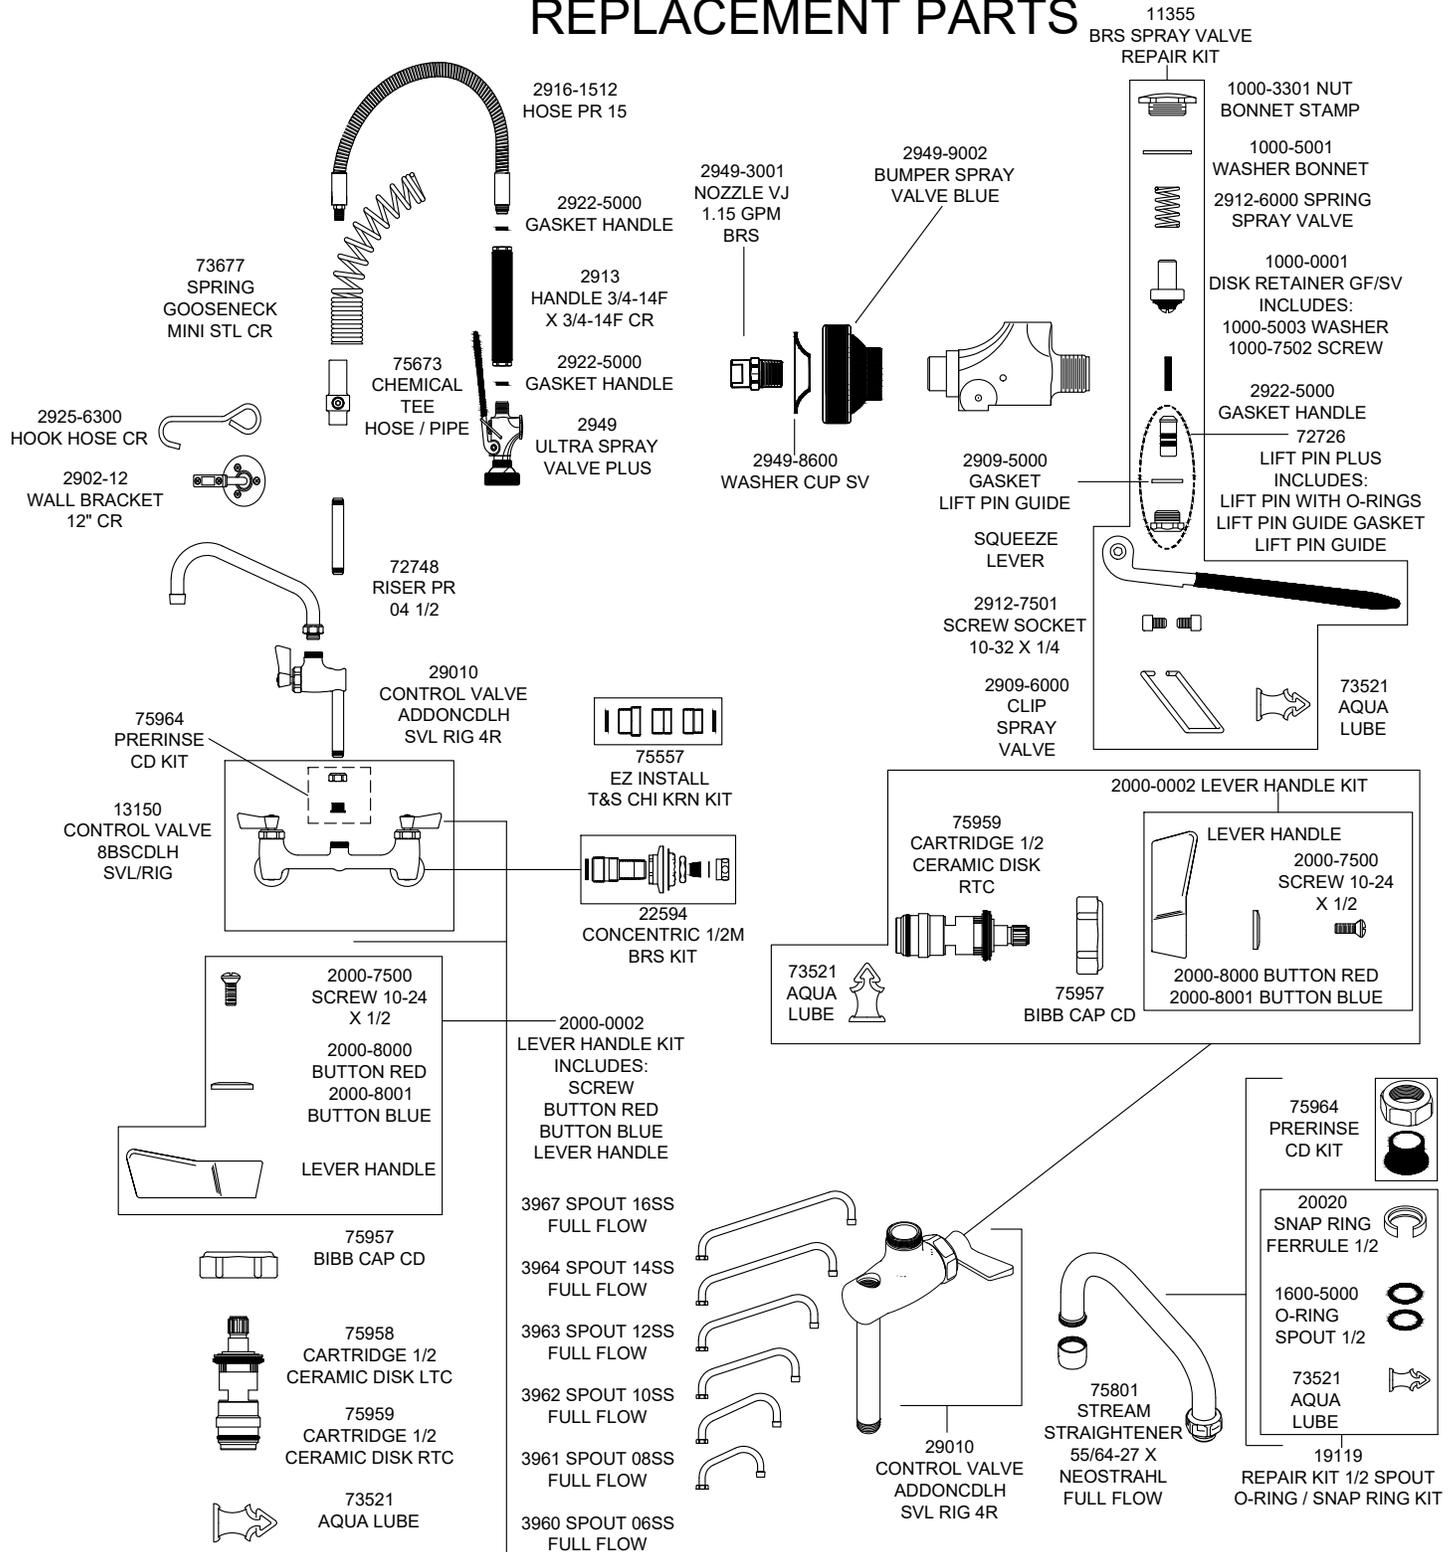

PRODUCT SPECIFICATIONS: 8" BACKSPASH LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, EZ INSTALL ADAPTERS

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) 2019 DOE PRSV - Class II