

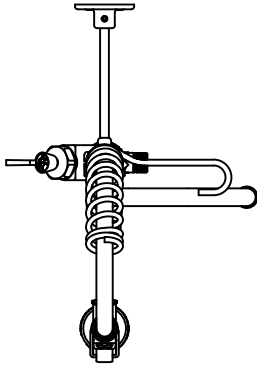


Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:	Architect/Engineer:			

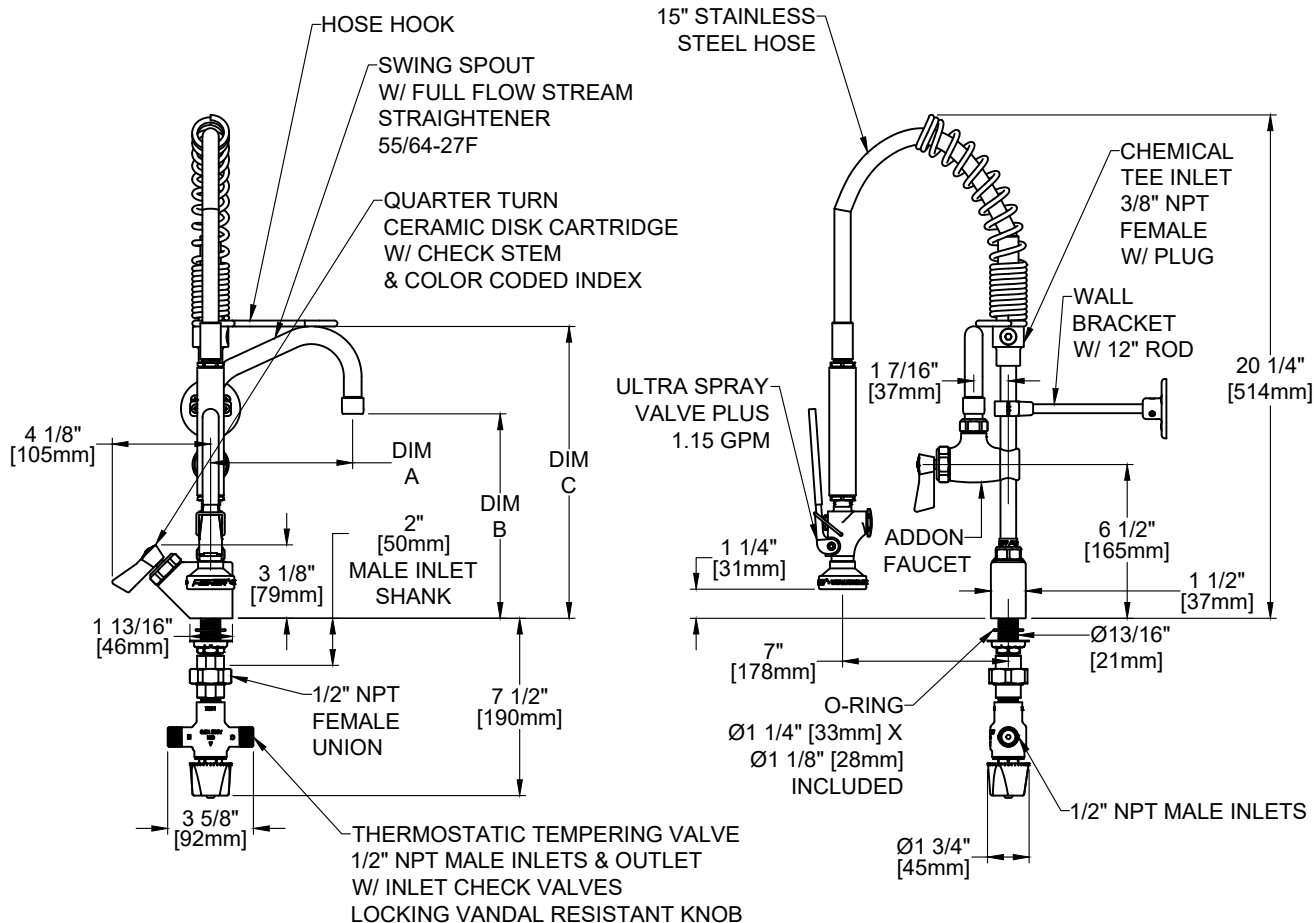

MODEL	DESCRIPTION	DIM A	DIM B	DIM C
82240	PRERINSE SLP SDCDLH 06SS TT	6" [152mm]	8 5/8" [219mm]	12 5/16" [313mm]
70140	PRERINSE SLP SDCDLH 12SS TT	12" [305mm]	10 1/4" [260mm]	13 15/16" [354mm]

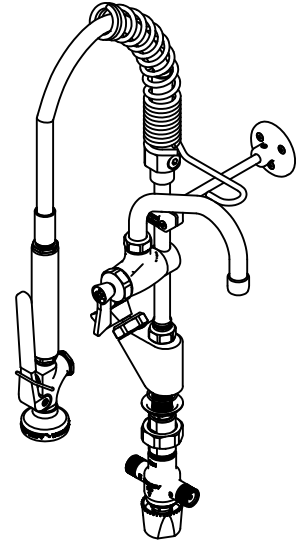


PRODUCT SPECIFICATIONS: SINGLE DECK LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGE, LEVER HANDLE, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, THERMOSTATIC TEMPERING VALVE

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class II

Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:	Architect/Engineer:			

REPLACEMENT PARTS

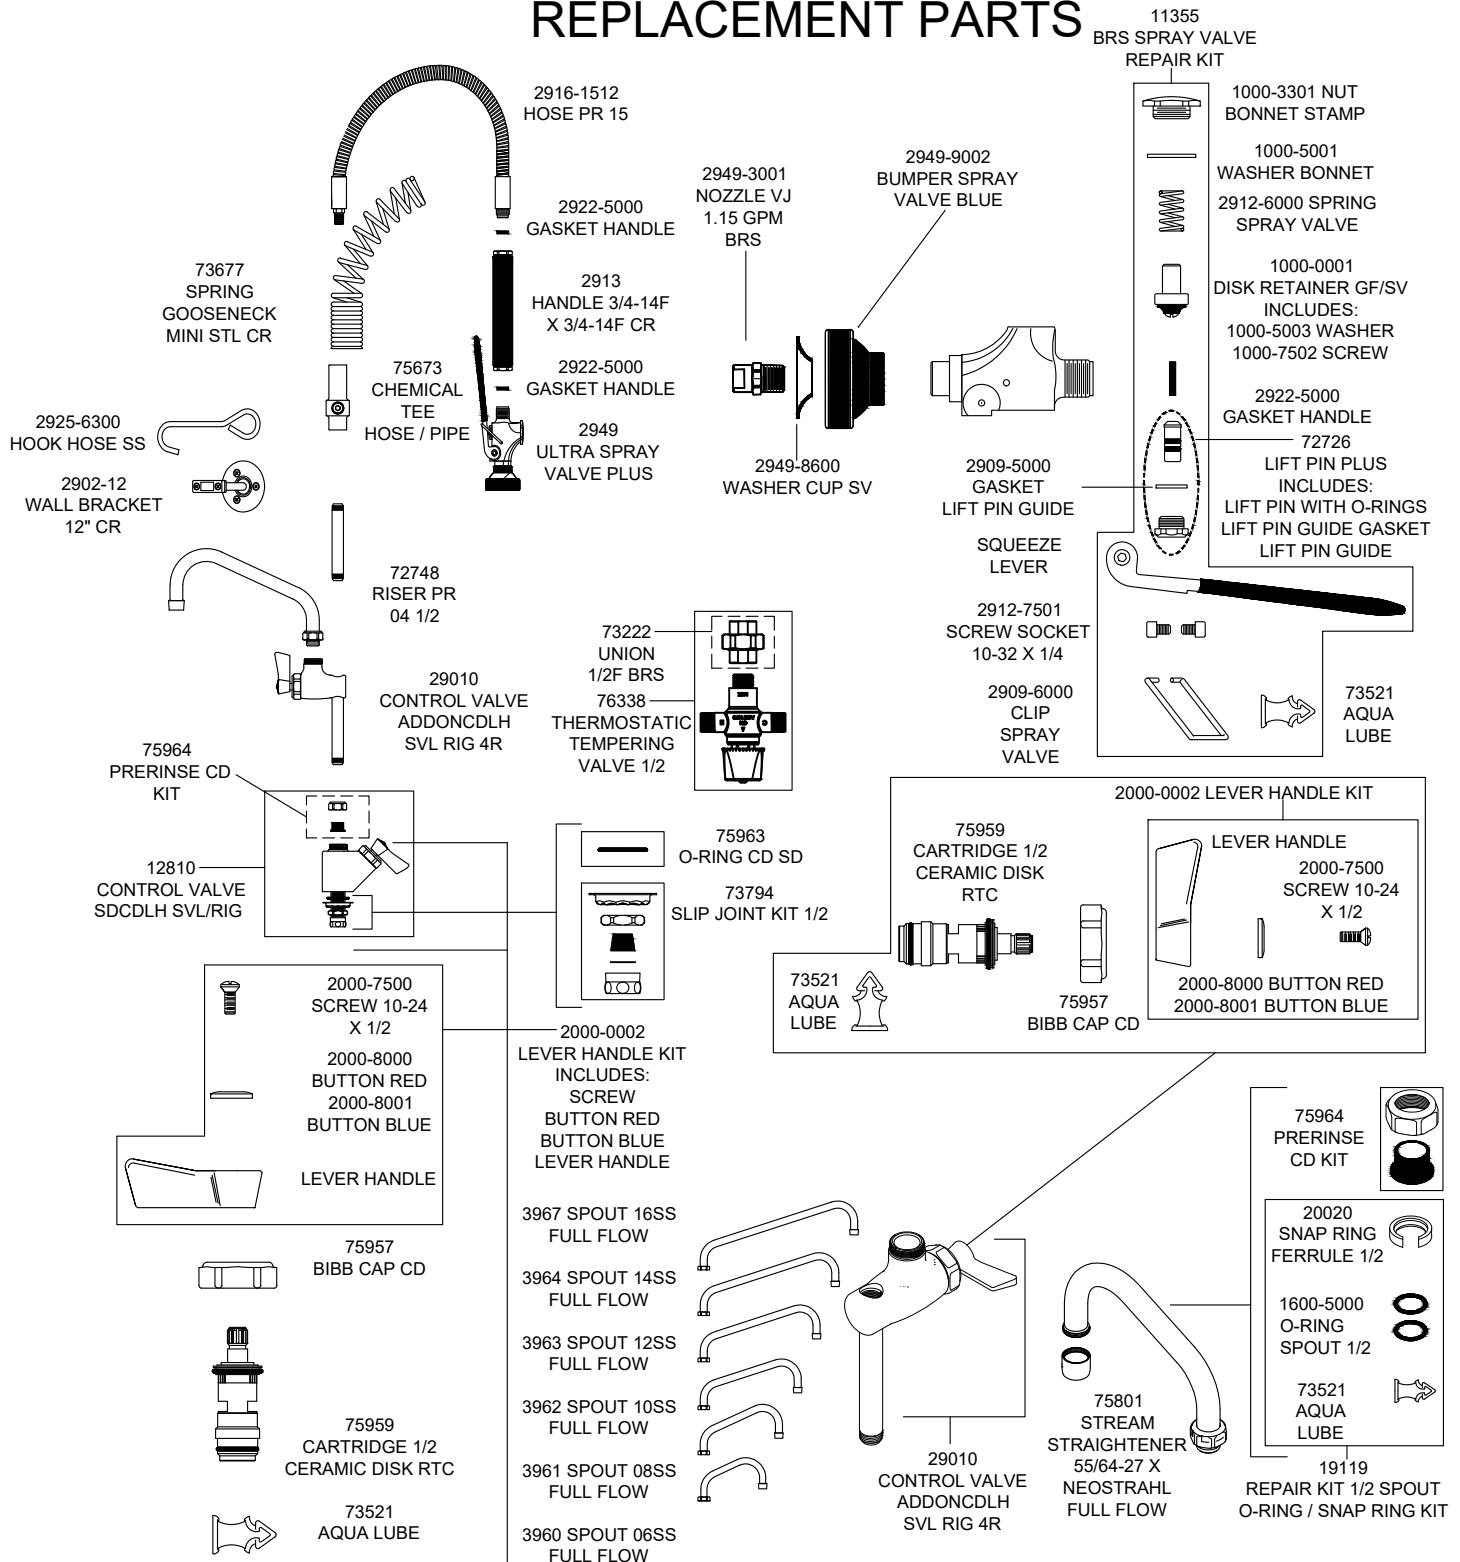

PRODUCT SPECIFICATIONS: SINGLE DECK LOW PROFILE SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGE, LEVER HANDLE, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, THERMOSTATIC TEMPERING VALVE

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class II