


Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

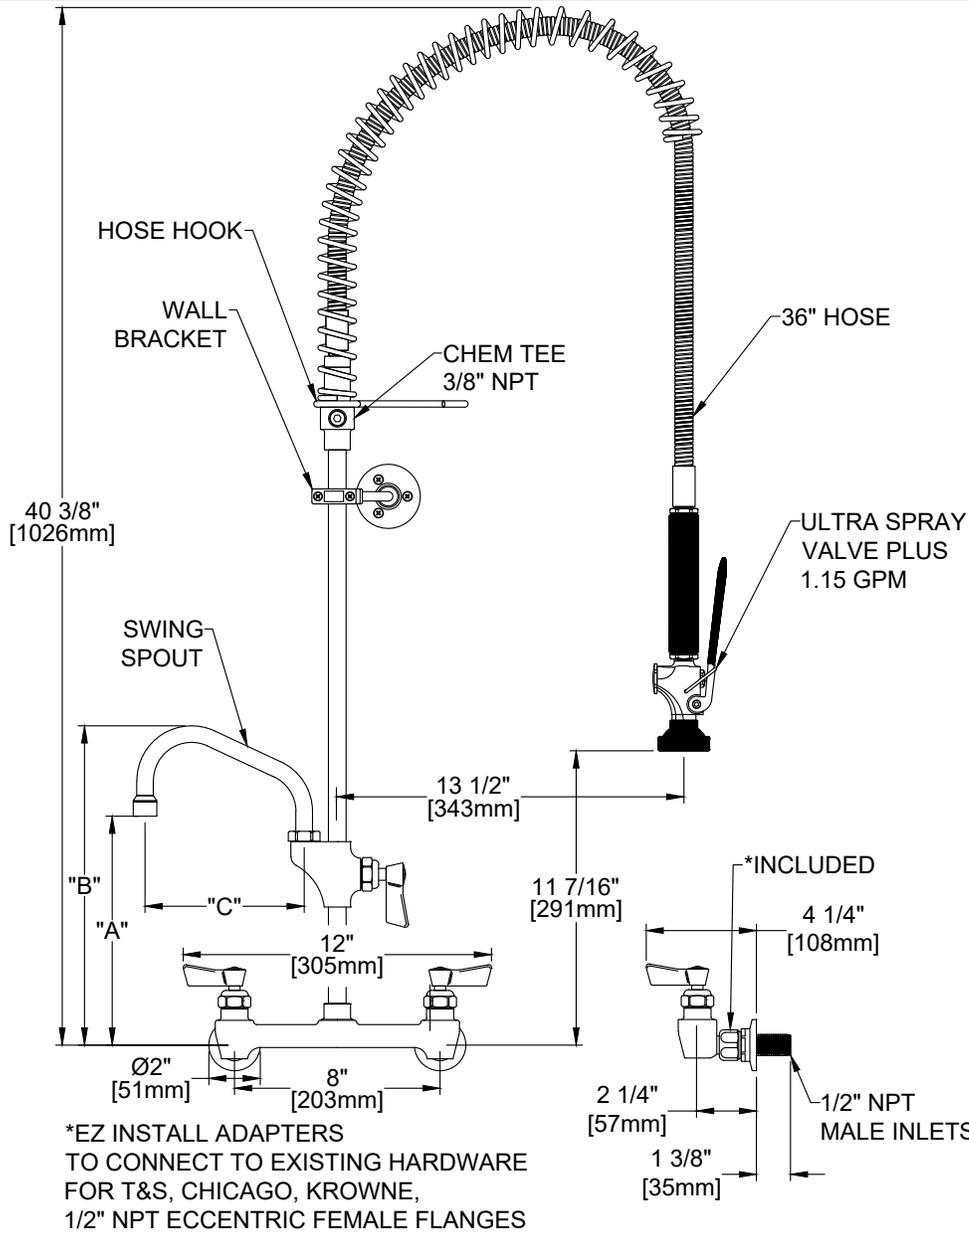

MODEL	DESCRIPTION	DIM A	DIM B	DIM C
52930	SS PRERINSE SPG 8BSZLH 06SS	8 3/4" [221mm]	12 3/8" [313mm]	6" [152mm]
52965	SS PRERINSE SPG 8BSZLH 12SS	10 1/4" [259mm]	13 7/8" [351mm]	12" [305mm]
52973	SS PRERINSE SPG 8BSZLH 14SS	10 5/8" [270mm]	14 3/4" [374mm]	14" [356mm]

PRODUCT SPECIFICATIONS: STAINLESS STEEL PRE-RINSE, 8" BACKSPASH CONTROL VALVE, LEVER HANDLES, ADD-ON FAUCET, SWING SPOUT W/ 2.2 GPM AERATOR, 36" STAINLESS STEEL HOSE, 1.15 GPM @ 60 PSI SPRAY VALVE, 12" WALL BRACKET, 1/2" NPT MALE INLETS, INCLUDES EZ INSTALL ADAPTERS

PRODUCT COMPLIANCE:  
ASME A112.18.1 / CSA B125.1  
NSF 61 - Section 9  
NSF 372 (Low Lead Content)  
2019 DOE PRSV - Class II

